


Rotor QuickConnect

Quick-action rotor clamping system for inserting or removing the middle horizontal rotors in **kolb** AQUBE® and PSE systems.

Part numbers:

0905AQ5-23QC (for AQUBE® / PSE 5) up to one rotor
 0905AQ6-23QC (for AQUBE® / PSE 6) up to two rotors
 0905AQ7-23QC (for AQUBE® / PSE 7) up to two rotors
 0905AQ9-23QC (for AQUBE® / PSE 9) up to three rotors

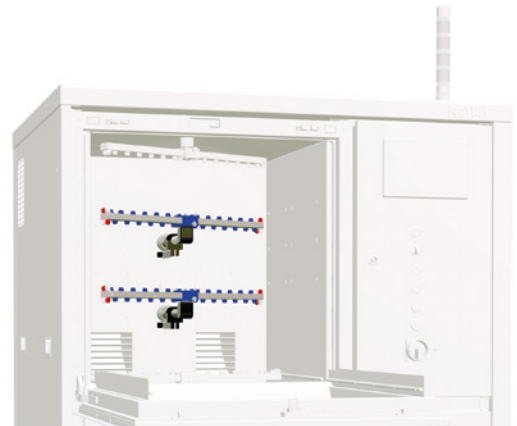

Application

With the QuickConnect rotor speed clamping system, the horizontal center rotors of a **kolb** cleaning system with horizontal rotor technology can be installed or removed within a few seconds. In general, the closer the rotors are to the goods to be cleaned, the more positive the nozzle pressure effects the cleaning speed and quality.

However, if goods to be cleaned require more headroom than the normal rotor arrangement allows, the center rotors can be easily removed using the quick-release system.

The rotors for smaller goods to be cleaned can be installed again just as quickly, which guarantees the optimum flexibility of the cleaning chamber.

Compatibility

☐	AQUBE® LH5
☐	AQUBE® LH6
☐	AQUBE® LH7
☐	AQUBE® XH6
☐	AQUBE® XH7
☐	AQUBE® XH7 TZD
☐	AQUBE® XH9
☐	AQUBE® XV7
☐	AQUBE® XV9
☐	AQUBE® MH6
☐	AQUBE® MH7
☐	AQUBE® MH7 TZD
☐	AQUBE® MH9
☐	AQUBE® MV3 ONE
☐	AQUBE® MV8 sTWIN
☐	AQUBE® MV9 QUAD
☐	PSE LH5
☐	PSE LH6
☐	PSE LH7
☐	PSE MH6
☐	PSE MH7
☐	PSE MV8 TWIN
☐	PSE 300 MV3 XL
☐	PSE 300 MV3 XXL
☐	PSE 300 MV3 ONE
☐	PSE 300 VL
☐	PSE 300 VS
☐	PSE 300 HD
☐	AF 04
☐	AF 20
☐	AF30
☐	AF75

Standard in the system

Option ex factory

Retrofittable by customer

Not compatible