

AQUBE® XH7

Fully automatic high end 3-tank, 3-circuit PowerSpray® XL ultra-fine cleaning system for cleaning of assembled PCBs

Cleans PCBs, hybrids and misprints from flux residues, resin, copper, oxide and soldering support substances

Capacity: up to 540 equals 8.6m² (92.5 ft²) eurocards in up to three variable drawer baskets

Part number: 0900AQ7XH41

CLEANING TECHNOLOGY

Made in Germany




Certifications:


This system in its basic version was certified for its energy and water saving processing, for easy operability and for the standard integration of comprehensive safety features.

- * Three tank system with three separate circuits
- * Smart Factory ready: DNAces, remote control, traceability (PLC data scanning and memorizing)
- * Fully automatic 4step (optional up to 5step) process: cleaning, (MediumWipe®), rinsing (tap water), DI-water rinsing, VMH®-TurboDigital hot air evaporative drying
- * 10 seconds relative cycle time for the cleaning, rinsing and drying of one eurocard
- * Horizontal PTFE mounted rotor system with up to six asynchronous spray rotors for thorough wetting (no blind spots)
- * Heater cleaning tank A, automatic water change for the rinsing circuit, DI water system, DI-bypass processing, water measuring unit (ion contamination measurement), ion exchanger and fine filter systems as standard
- * Processes and service intervals PLC controlled. Event issuing and software control via touch screen
- * EDGELESS Design and VARlccess® service access: maximum capacity, easy maintenance on a very small footprint
- * Suitable for high temperature cleaning and rinsing up to 80 °C (176 °F)


Key applications




Assembled PCBs



Hybrids (HDI)



Hybrids (SiPs)



DCBs

The new **kolb AQUBE®** series offer next-generation cleaning systems - even more efficient, even more compact, easy to handle and maintain, pre-equipped for extended water management and cyber-physically ready for the smart factory (SF ready).

AQUBE® XH7 is a completely German engineered and manufactured fully automatic high volume PCB cleaning system with an XL process chamber - except **kolb AQUBE® 9** types there are no batch systems with a comparably large chamber size available worldwide - with a capacity of up to 540 (8.6 m²) eurocards and a relative cleaning time of 10 seconds per card.


The three-tank, three-circuit configuration ensures very short cycle times, low running costs and makes this system the perfect economic choice for the precision cleaning of assembled PCBs. With up to 80° (176 °F) cleaning and 120° (248 °F) drying temperature also ideally suited for parts cleaning of medical equipment and use in the production of medical electronics.

The cleaning system can be operated with all common electronics cleaning supplies (detergents / chemistry, etc.) which are approved by the manufacturer.

Performance description of a fully equipped system. All rights for changes reserved that lead to technical improvement.

© kolb GmbH 2024

kolb Cleaning Technology GmbH • Karl-Arnold-Str.12 • D - 47877 Willich (Germany) • Phone: +49 (0) 2154 9479 - 38 • e-mail: info@kolb-ct.com • www.kolb-ct.com








AQUBE® XH7

Fully automatic high end 3-tank, 3-circuit PowerSpray® XL ultra-fine cleaning system for cleaning of assembled PCBs

Part number: 0900AQ7XH41



Application overview

|  |  |  |  |  |
|---|---|---|--|---|
| Most suitable | Optional suitable | Optional suitable | Optional suitable | Not suitable |
| PCBAs, Hybrids Power electronics Misprints (mounted) | Stencils Screens Misprints (bare boards) | Solder frames Solder carriers Solder masks | ESD Boxes Containers Magazines | Condensation traps Filters Steel sheets |

Optional suitable applications can also be optimally realized with the appropriate options.

Cleaning (key process 1): From the cleaning tank A (TA) the cleaner liquid is sucked by a magnetically coupled pump unit and routed with a controllable volume flow through a separate circuit into the PTFE mounted ASYNCHRO® stainless steel spray rotors with patented PUSHFORCE® nozzles. Their geometry ensures a comprehensive and thorough cleaning, even in inaccessible and critical areas. After the washing procedure, the valve switchover of the process chamber undocks the cleaning circuit until the next process run.

MediumWipe® (optional intermediate process): The remaining cleaner is blown off from the clean products and blown out of the cleaner circuit and recirculated into the cleaning tank before the valve switchover closes.

Rinsing with tap water (key process 2): From the first rinsing tank B (TB), the water is pumped through the separate second circuit into the spray rotors. Tap water has (compared to DI / DM water) the advantage of lower surface tension and thus flushes also critical points as low standoffs more efficient.


MediumWipe® (optional intermediate process): The remaining water is blown off from the products and blown out of the cleaner circuit and recirculated into the rinsing tank (TB).

Clear rinsing with DI / DM water (key process 3): The DI / DM water is produced in an integrated MB-cartridge from tap water and kept in the second rinsing tank C (TC). Through the third cycle it flushes conducting ions of the preliminary processes. This process is repeated automatically until the remaining amount of ions falls below the programmed value.

MediumWipe® (optional intermediate process): Blowing off and recirculating the remaining DI / DM water into the rinsing tank (TC).

Drying (key process 4): The clean products are dried with the patented VMH® (Venturi Mixed Hot air) technology. A high volume flow of normal circulating air is blown into a venturi nozzle. The resulting differential pressure there (passively) sucks on a small amount of very high temperature air. The resulting air mixture provides for uniformly high drying temperature - adjustable between 45 and 120 °C (113 and 248 °F) - all over the process chamber. Further advantages are robustness and low cost of ownership. Energy is only needed for a fan and the heating of a very small amount of air; the rest is executed by pressure differences and air duct geometry.

Maintenance: The system has a VARlccess® maintenance access system with recessed, variable doors and removable panels. In the maintenance area among others are the pump-out set, the re-dosage unit with space for a 25 liter detergent container and an optional re-dosing unit for a 5 l additive container as well as the MB cartridge for DI / DM water processing. Tank levels as well as pressure values and maintenance cycles are monitored by the PLC and displayed on the touch screen.



AQUBE® XH7


Fully automatic high end 3-tank, 3-circuit PowerSpray® XL ultra-fine cleaning system for cleaning of assembled PCBs

Part number: 0900AQ7XH41



Main standard features

- ☐ PowerSpray® technology bundle: magnetically coupled XL-Power (tank A) and S-Power (tank B, tank C) pump units, lower VA drawer basket, twofold ASYNCHRO® volume-spray rotorsystem with low maintenance PTFE mounted stainless steel rotors and PUSHFORCE® special nozzles, "Option100" software program (100 freely selectable process programs)
- ☐ PolyPower® pump-nozzle configuration with power pump unit
- ☐ EATON Programmable Logic Controller (PLC) with module extension for special programming and technology extensions
- ☐ Smart Factory ready: DNAccess® (standard) for remote control (see options) and traceability with retractable touch monitor and integrated industrial PC (see options)
- ☐ High resolution 10" (1,024 x 600 px) display with capacitive multi-touch and intuitive process view
- ☐ Fourfold alternating LED status light bar integrated in the system frame
- ☐ Function package PCBA Cleaning (incl. option automatic water change for rinsing circuit / tank C with lifting unit, option heater cleaning tank (TA), function package DI water system (incl. DI / DM water measuring unit (residual ion contamination measurement), DI-bypass processing, ion exchanger cartridge, cartridge deaerator)
- ☐ Full flow coarse filter (process chamber)
- ☐ Function package Fine Filter System Tank A (incl. XL-Power pump unit for the cleaning circuit, fine filter system and sediment filter for the cleaning tank A (TA))
- ☐ Fine filter for the rinsing circuit / rinsing tank B (TB)
- ☐ Function package AOSelection® - for separate discharge of rinsing water rinsing water that must be disposed (incl. automatic wastewater changer for rinsing tank B (TB), 1000 liter IBC empty container, overflow protection for empty container).
- ☐ ClosedLoop reprocessing of cleaning and rinsing fluids
- ☐ Automatic re-dosage unit for 25 l detergent container
- ☐ VMH® TurboDigital hot air evaporative drying (control range approx. 45 - 120 °C / 113 - 248 °F)
- ☐ ESD grounding point for the operating personnel
- ☐ Ø 160 mm (6.3") exhaust air and vapor extraction unit
- ☐ Safety features: safety interlock on the process chamber door, overflow alarm for all tank sections, overheating protection for all heating and drying elements, end switches for all motor-driven valves and drives, personnel protection insulation
- ☐ VARlccess® service access with right and left-hinged side doors as well as unhinging possibility for side doors, front panel, and rear supply rail
- ☐ EDGELESS housing design. Doors, cover panels and hinges without edges, depot for traceability scanner and monitor in the right side panel
- ☐ Process sections made of electrolysis resistant elements



AQUBE® XH7

Fully automatic high end 3-tank, 3-circuit PowerSpray® XL ultra-fine cleaning system for cleaning of assembled PCBs

Part number: 0900AQ7XH41



Main options

- ☐ Function package High-Temperature Application (incl. process chamber heat insulation and VapourStop temperature stabilization)
- ☐ Function package WPCL IU Wastewater Recycling Unit (incl. WPCL IU-T3 SYMBIO® module, option automatic re-dosing unit for 5 l additive canister, 3 ion exchanger cartridges, 3 cartridge deaerators, overflow protection for external IBC container)
- ☐ Function package WPSD IU Wastewater Treatment Unit (incl. WPSD IU5/7 SYMBIO® module, pH-lowering unit with pH measuring probe, pH re-dosing, control valves, two heavy metal adsorber cartridges, two cartridge deaerators)
- ☐ Function package Online Cleaner Regulation (incl. brix monitor for refraction measurement, automatic re-dosing of the cleaner, flow meter, dosing ball valve)
- ☐ Function package Traceability "Basic" (incl. SPC data scanner, data backup in CSV file, backup via SD card (via slot in the PLC))
- ☐ Function package Traceability "Comfort" (incl. PLC data scanner and retractable touch monitor and industrial PC with Intel processor)
- ☐ Function package QuickChange (incl. SlideIn quick-loading feeder unit, upper wash basket with PTFE-mounted ASYNCHRO® TopDown stainless steel double rotors with PUSHFORCE® special nozzles and SpeedLoad cart to accommodate of two feeder units)
- ☐ Automatic re-dosage unit for 5 l additive container
- ☐ Decalcification unit for reducing the lime content in the rinsing water (tap water) circuit / rinsing tank B (TB)
- ☐ Air filter unit for filtering the drying air according to filter class F7
- ☐ MediumWipe® unit for further optimization of detergent and rinsing fluid use
- ☐ Upper & middle VA drawer basket with ASYNCHRO® PTFE mounted stainless steel TopDown-double rotors with PUSHFORCE® special nozzles
- ☐ Permanent automatic rotor run control
- ☐ QuickConnect rotor quick-clamping system for fast insertion or removal of the rotors
- ☐ Remote control (browser-based control / monitoring via mobile device or PC)
- ☐ RMA Remote Maintenance Assistance (factory controlled maintenance support)
- ☐ Paint of choice (frame rack, coverings and hood)
- ☐ X-Power pump units for the rinsing circuits / rinsing tanks B and C (TB, TC)
- ☐ XXL pump unit for the cleaning circuit / cleaning tank A (TA)t



AQUBE® XH7

Fully automatic high end 3-tank, 3-circuit PowerSpray® XL ultra-fine cleaning system for cleaning of assembled PCBs


Part number: 0900AQ7XH41

CLEANING TECHNOLOGY

Made in Germany



Internal rinse water processing (standard)

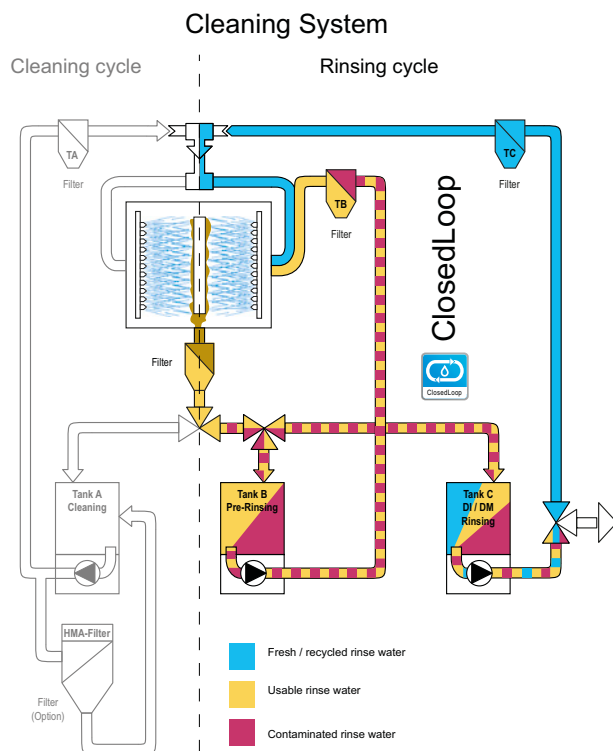

Options* for water management


WPSD IU SYMBIO-module

Processes mandatory disposable sewage water to be discharged into a public sewage network.

WPCL IUT-3 SYMBIO-module

Recycles DI / DM water for recirculation and multiple reuse in the cleaning systems clear rinsing cycle.

* Operating companies of industrial cleaning systems are responsible for proper disposal of wastewater / rinse water and (wasted) cleaning detergent. Further information on wastewater management at www.kolb-ct.com/systems/water-management/, consulting requests to info@kolb-ct.com



AQUBE® XH7

Fully automatic high end 3-tank, 3-circuit PowerSpray® XL ultra-fine cleaning system for cleaning of assembled PCBs


Part number: 0900AQ7XH41




Technical data

| | |
|--|---|
| Technology base | kolb PowerSpray® |
| Capacity | 540 (8.6 m² / 92.5 ft²) eurocards |
| Process chamber dimensions | W 700 ▪ D 720 ▪ H 710 mm (W 27.55" ▪ D 28.34" ▪ H 27.95") |
| Usable space lower basket only | W 610 ▪ D 625 ▪ H 625 mm (W 24.21" ▪ D 24.6" ▪ H 24.6") |
| Usable space utilizing three baskets | W 610 ▪ D 625 ▪ H 140 mm (W 24.21" ▪ D 24.6" ▪ H 5.51") - three times |
| Volume tank A (cleaning) | 55 l |
| Volume tank B (rinsing) | 45 l |
| Volume tank C (DI-rinsing) | 86 l |
| Power supply | 400 V AC, 16 A, CEE plug / 3 Ph / 50 or 60 Hz |
| Power consumption | approx. 8 kW |
| Control system | PLC (EATON) |
| Temperature load | up to 80 °C (176 °F) |
| Control range drying | approx. 45 - 120 °C (113 - 248 °F) |
| Filter system | up to four stages - 1. Full flow coarse filter < 2mm (0.08"), 2. Sediment filter inside the tank, 3. 20" fine filter (1 - 100 µm - process dependent), 4. HMA filter |
| Supply connection 1 (tap water) | > 18 °C, 1/2" hose with 30µm water filter (on-site inlet water quality, pressure 3 - 4 bar, < 250 - 350 µS conductivity (< 10° dH) or descaling unit option. Do not use a softening / soft water system in the inlet) |
| Supply connection 2 (DI / DM water) | > 18 °C, 1/2" hose with 30µm water filter (DI-net provided by customer or bridging to tap water) |
| Supply connection 3 (compressed air) | 6 - 8 bar (87 - 116 psi) - 100 l / min for options HT-version or MediumWipe®, connection for 8 mm (0.31") compressed air hose |
| Rinse water drain connection | (with integrated pump out system) connection for 1" hose |
| Exhaust connection | Ø 160 mm (6.3"), exhaust capacity 200 - 300 m³ / h (7,063 - 10,595 ft³ / h) |
| Operating noise / Footprint / Empty weight | 63 dB (A) / 1,200 x 1,340 mm (47.24" x 52.75") / 480 kg (1,058 lbs) |

Top view

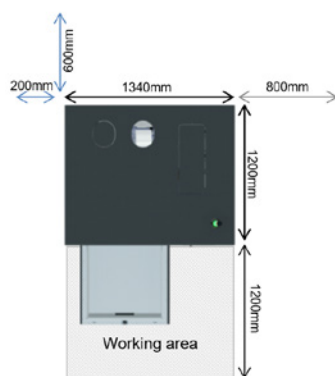

Front view



- Recommended maintenance area
- Space for connections

Performance description of a fully equipped system. All rights for changes reserved that lead to technical improvement.

© kolb GmbH 2024