


## PSE MV8 TWIN

Fully automatic twotank economy system with two separate circuits and fourfold ASYNCHRO® rotor system

Cleans screens, stencils and PumpPrints from SMD paste, SMD adhesive, soldering support substances, oil & dust

Capacity: 2 Stencils, screens, carriers up to 800 x 950 mm (31" x 37")

Part number: 0900PSE8MV12

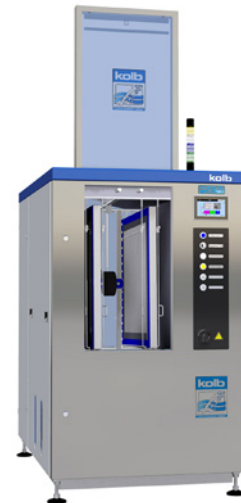


### Certifications:

This system in its basic version was certified for its energy and water-saving processing, for easy operability and for the standard integration of comprehensive safety features.

- \* Two tank system with two separate circuits
- \* Comfortable push one button operation
- \* Fully automatic 4step process: cleaning, MediumWipe®, rinsing, drying with CWA® supercharger compression drying
- \* Vertical fourfold rotor system with asynchronous spray rotors for thorough wetting (no blind spots)
- \* Short cycle times due to placing the cleaning goods close to the spray rotors
- \* Water-free operation possible: Due to the separate double tank configuration the system can operate with suitable cleaning / rinsing detergents for rinsing
- \* Processes and service intervals PLC controlled, event issuing and software control via 7" touch screen
- \* Safe installation close to the production line possible
- \* Extremely compact - maximum capacity on a small footprint


### Key applications




Screens



Stencils



PumpPrints




M-TeCK stencils

The **kolb** PSE economy line is a quality series of advanced cleaning systems, which focuses on all essential criteria for a qualified cleaning process and therefore stands for attractive purchase prices.

**kolb** PSE MV8 TWIN is a fully automatic system with a large process chamber for reliable precision cleaning of two screens, stencils, PumpPrints or other flat products. Removes quickly and thoroughly contaminations such as SMD-paste, SMD-adhesive, flux residues, stabilizer materials, flux, oil, grease or dust. PSE MV8 TWIN cleans two stencils up to 900 x 800 mm (35" x 32") in a very short cycle time, making it especially suitable for large-scale manufacturing.

PSE MV8 is a German engineered and manufactured machine with ClosedLoop water reprocessing and a two-tank and two separate circuits configuration which ensures short cycle times and makes this system the perfect economic choice for the cleaning of larger screens and stencils.


**The cleaning system can be operated with all common electronics cleaning supplies (detergents / chemistry, etc.) which are approved by the manufacturer.**








## PSE MV8 TWIN

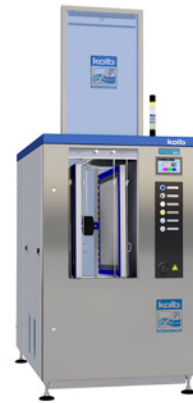Fully automatic twotank economy system with two separate circuits and fourfold ASYNCHRO® rotor system

Part number: 0900PSE8MV12



### Application overview

				
Optional suitable	Most suitable	Optional suitable	Not suitable	Not suitable
PCBAs, Hybrids Power electronics Misprints (mounted)	Stencils Screens Misprints (bare boards)	Solder frames Solder carriers Solder masks	ESD Boxes Containers Magazines	Condensation traps Filters Steel sheets

Optional suitable applications can also be optimally realized with the appropriate options.

**Cleaning** (key process 1): The process chambers can be operated in parallel or sequential mode. From the cleaning tank A (TA) the cleaner liquid is sucked by a magnetically coupled pump unit and routed with a controllable volume flow through a separate circuit into the ASYNCHRO® spray rotor nozzles. Their geometry ensures a comprehensive and thorough cleaning, even in inaccessible and critical areas.

**MediumWipe®** (intermediate process 2): The remaining cleaner is blown off from the clean products and blown out of the cleaner circuit and recirculated into the cleaning tank (TA) before the valve switchover closes.

**Rinsing with tap water** (key process 3): From the rinsing tank B/C (TB/C) the water is pumped through the separate second circuit into the spray rotors. Tap water has (compared to DI / DM water) the advantage of lower surface tension and thus flushes also critical points as small apertures more efficient.

**MediumWipe®** (intermediate process 2): The remaining water is blown off from the products and blown out of the cleaner circuit and recirculated into the rinsing tank (TB/C).

**Final rinsing with DI / DM water** (optional process): The DI / DM water is produced from tap water in an integrated MB-cartridge and flushes conducting ions of the previous processes. This process is repeated automatically until the remaining amount of ions falls below the programmed value.

**MediumWipe®** (optional intermediate process): Blowing off and recirculating the remaining DI / DM water into the rinsing tank (TB/C).

**Drying** (key process 4): The purified products are dried with the patented CWA® (Compressed Warm Air) technology. The built-in special compressor compresses the ambient air. At the same time it collects the kinetic energy (frictional heat) of the paddle wheel in the unit, then presses the heated and compressed air into the rotor nozzles which were already used for cleaning and rinsing. There it blows off (pressure) and evaporates (heat) the residual moisture. This method is energetically and constructively highly efficient, as it uses the "waste heat" of the compressor rotation and the compressed air as driving power for the rotors. In addition, a system equipped with CWA® technology requires no additional hardware and no external compressed air connection for the MediumWipe® process.


**Maintenance:** The system has a large maintenance door on the right side. In the maintenance area among others are the pump-out set, the re-dosage unit with space for a 25 liter detergent container and an optional re-dosing unit for a 5 l additive container as well as the MB cartridge for DI / DM water processing. Tank levels as well as pressure values and maintenance cycles are monitored by the PLC and displayed on the touch screen.



## PSE MV8 TWIN

Fully automatic twotank economy system with two separate circuits and fourfold ASYNCHRO® rotor system

Part number: 0900PSE8MV12



### Main standard features

- ☐ PowerSpray® technology bundle: magnetically coupled XXL-Power (tank A) and X-Power (tank B/C) pump units, fourfold ASYNCHRO® volume-spray rotor system, "Option100" softwareprogram (100 freely selectable programs)
- ☐ EATON Programmable Logic Controller (PLC)
- ☐ High resolution 7" (1,024 x 600 mm) display with capacitive multi-touch
- ☐ Full flow coarse filter (process chamber)
- ☐ Function package Fine Filter System Tank A (incl. XXL-Power pump unit for the cleaning circuit, fine filter system and sediment filter for the cleaning tank A (TA))
- ☐ Function package Fine Filter system Tank B/C (incl. X-Power pump unit for the rinsing circuit and fine filter system for rinsing tank B/C (TB/C))
- ☐ MediumWipe® unit for further optimization of detergent and rinsing fluid use
- ☐ ClosedLoop reprocessing of cleaning and rinsing fluids
- ☐ Automatic re-dosage unit for 25 l detergent container
- ☐ CWA® supercharger compression drying
- ☐ Ø 160 mm Chamber exhaust system with extraction control and integrated condensate recovery system
- ☐ Spare space for DI / DM water processing cartridge
- ☐ Safety features: safety interlock on the process chamber door, overflow alarm for all tank sections, overheating protection for all heating and drying elements, end switches for all motor-driven valves and drives, personnel protection insulation
- ☐ Machine body made of stainless steel
- ☐ Process sections made of electrolysis resistant elements

### Main options


- ☐ Function package DI Water System "Combi" (incl. function package DI water system (incl. DI / DM water measuring unit, (residual ion contamination measurement), mixing / blending unit, ion exchanger cartridge, cartridge deaerator) and option automatic water exchange for the rinsing tank (TB/C))
- ☐ Function package Noise Insulation (incl. option housing insulation and option safety / storage tray with integrated underfloor insulation mat)
- ☐ Function package Traceability "Basic" (incl. SPC data scanner, data backup in CSV file, backup via SD card (via slot in the PLC))
- ☐ Automatic re-dosage unit for 5 l additive container
- ☐ Automatic water change with pump out system for the rinsing circuit / rinsing tank B/C (TB/C)
- ☐ Decalcification unit for reducing the lime content in the rinsing water (tap water) circuit / rinsing tank B/C (TB/C)
- ☐ Heater for cleaning tank A (TA)
- ☐ Remote control (browser-based control / monitoring via mobile device or PC)
- ☐ Paint of choice (coverings and hood)
- ☐ XL-Power pump unit for the rinsing circuit / rinsing tank B/C (TB/TC)



## PSE MV8 TWIN

Fully automatic twotank economy system with two separate circuits and fourfold ASYNCHRO® rotor system


Part number: 0909PSE8MV12



### Technical data

Technology base	<b>kolb PowerSpray®</b>
Capacity per process cycle	2 Stencils, screens, carriers up to 800 x 950 mm (31" x 37")
Process chamber dimensions	W 550 • D 1000 • H 875 mm (W 21.65" • D 39.37" • H 34.45")
Usable chamber dimensions	2 slots: B 50 • T 800 • H 900 mm (W 1.97" • D 31.5" • H 35.43")
Volume tank A (cleaning)	75 l
Volume tank B (rinsing)	75 l
Power supply	400 V AC, 16 A, CEE plug / 3PH / 50 or 60 Hz
Power consumption	4 kW
Control system	PLC (K & M)
Temperature load	up to 50°C (122 °F)
Filter system	up to three stages - 1. Full flow coarse filter < 2mm (0.08"), 2. Sediment filter inside the tank, 3. 20" fine filter (1 - 100 µm - process dependent)
Supply connection 1 (tap water)	> 18 °C, 1/2" hose with 30µm water filter (on-site inlet water quality, pressure 3 - 4 bar, < 250 - 350 µS conductivity (< 10° dH) or descaling unit option. Do not use a softening / soft water system in the inlet)
Supply connection 2 (compressed air)	6 - 8 bar (87 - 116 psi) - 100 l / min, connection for 8 mm (0.31") compressed air hose
Rinse water drain connection	(with integrated pump out system) connection for 1" hose
Exhaust connection	Ø 160 mm (6.3"), exhaust capacity 200 - 300 m³ / h (7,063 - 10,595 ft³ / h)
Footprint	1,050 x 1,700 mm (51.34" x 66.93")
Operating condition room temperature	20 - 35 °C (68 - 95 °F)
Operating noise	74 dB (A), 70 dB (A) with function package Noise Insulation
Empty weight	570 kg (1,257 lbs)

Top view PSE-MV8

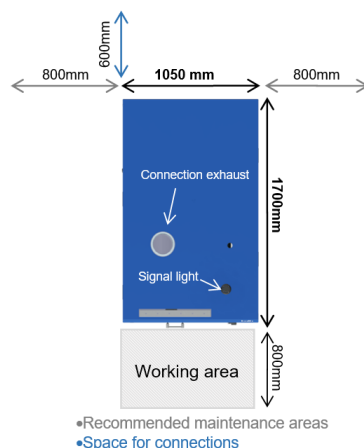

Front view PSE-MV8

